



TITLE:

# Discontinuous dynamics of electric power system with dc transmission: A study on DAE system

AUTHOR(S):

Susuki, Yoshihiko; Hikiyara, Takashi; Chiang, Hsiao-Dong

---

CITATION:

Susuki, Yoshihiko ...[et al]. Discontinuous dynamics of electric power system with dc transmission: A study on DAE system. IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS I-REGULAR PAPERS 2008, 55(2): 697-707

ISSUE DATE:

2008-03

URL:

<http://hdl.handle.net/2433/84548>

RIGHT:

© 2008 IEEE. Personal use of this material is permitted. However, permission to reprint/republish this material for advertising or promotional purposes or for creating new collective works for resale or redistribution to servers or lists, or to reuse any copyrighted component of this work in other works must be obtained from the IEEE.

# Discontinuous Dynamics of Electric Power System With DC Transmission: A Study on DAE System

Yoshihiko Susuki, *Member, IEEE*, Takashi Hikiyara, *Member, IEEE*, and Hsiao-Dong Chiang, *Fellow, IEEE*

**Abstract**—Transient stability of power systems with dc transmission is an important problem for planning and operation of future power networks. A differential-algebraic equation (DAE) system is proposed for transient stability analysis of a practical ac/dc power system which includes one synchronous generator operating onto both ac and dc transmissions. When transient stability analysis is performed using the DAE system, its solutions that represent dynamics of the ac/dc power system become discontinuous. This is because a constraint set, which is a set of variables satisfying algebraic equations of the DAE system, discontinuously changes at the onset of fault occurrence and clearing. We numerically and analytically examine such discontinuous solutions of the DAE system and associated transient dynamics of the ac/dc power system. The discontinuous nature of solutions shows that enhancement of transient stability via dc transmission is characterized by a dynamical system on a constraint set or a manifold controlled by input as installation of dc transmission.

**Index Terms**—DC transmission, differential-algebraic equation (DAE), discontinuous solution, power system, singular perturbation, transient stability.

## I. INTRODUCTION

DC TRANSMISSION systems or dc links have been widely applied to conventional electric power systems [1], [2]. They have been traditionally utilized in areas where there is a clear financial advantage or where they are technically the only solutions. The authors of [3]–[5] note that dc links are nowadays adopted in much larger areas of power system operation and planning such as stabilization of power systems, high-voltage (HV) transmission, and long-distance transmission. The Kii channel HVDC Link in Japan [6] is a well-known modern installation of dc links. DC-based power technology also plays a key role in future systems under competitive markets to deliver electricity between different asynchronous areas [3].

The problem of estimating transient stability in electric power systems with dc transmission is of fundamental importance for power system planning and operation. Transient stability is concerned with a power system's ability to reach

an acceptable (steady-state) operating condition following an event disturbance [7], [8]. The stability is governed by nonlinear transient dynamics [9] of power systems. As stated above, dc links are expected to stabilize conventional ac power systems. One of their potential abilities is to eliminate operating constraints of ac power systems caused by transient stability. Another is to enhance transient stability of ac power systems using dc links [10]–[13]. Both of the effects of dc links have great significance for operation and planning of future power systems. However, these mechanisms have not been fully understood from an analytical point of view. This provides a motivation to analytical studies on transient dynamics and stability of ac/dc power systems.

Transient stability of ac/dc power systems is mainly analyzed via the two different approaches. One is numerical simulation with analog or digital computers, e.g., [10], [14], and [15]. The numerical approach is applicable to estimating transient stability with considering detailed behaviors of ac/dc power systems. The other is direct analysis of transient stability: energy functions approach [16]–[19] and dynamical systems methods [20]. The analytical approach has a potential to clarifying the mechanisms of the transient stability of ac/dc power systems and stabilization via dc links.

As one of the analytical studies on transient stability, in this paper, discontinuous transient dynamics is examined for an electric power system with dc transmission. A differential-algebraic equation (DAE) system is proposed in [21]–[23] for transient stability analysis of a practical ac/dc power system which includes one synchronous generator operating onto both ac and dc transmissions. When transient stability analysis is performed using the DAE system, its solutions that represent dynamics of the ac/dc power system become discontinuous. This is because a constraint set, which is a set of variables satisfying algebraic equations of the DAE system, discontinuously changes at the onset of fault occurrence and clearing. This paper focuses on such discontinuous solutions of the DAE system and associated transient dynamics of the ac/dc power system. The purpose of this paper is twofold. One is to exhibit discontinuous solutions of the DAE system. The other is to analyze transient stability of the ac/dc power system through discontinuous solutions. The analysis provides an important clue for clarifying the mechanism of transient stabilization via dc link. A preliminary discussion for this paper is presented in [24] which does not have any content in Sections V and VI.

Investigating transient stability of power systems based on discontinuous solutions is not a new approach. For a structure-preserving model [25], the existence of discontinuous solutions

Manuscript received May 9, 2006; revised April 25, 2007. This work was supported in part by the Ministry of Education, Culture, Sports, Sciences and Technology in Japan, The 21st Century COE Program 14213201, Grant-in-Aid for Exploratory Research 16656089, 2005, and the Young Research (B) Grant 18760216, 2006. This paper was recommended by Associate Editor M. D. Ilic.

Y. Susuki is with the Department of Electrical Engineering, Kyoto University, Kyoto 615-8510, Japan (e-mail: susuki@dove.kuee.kyoto-u.ac.jp).

T. Hikiyara is with the Department of Electrical Engineering and the Photonics and Electronics Science and Engineering Research Center, Kyoto University, Kyoto 615-8510, Japan (e-mail: hikiyara@kuee.kyoto-u.ac.jp).

H.-D. Chiang is with the School of Electrical and Computer Engineering, Cornell University, Ithaca, NY 14853 USA (e-mail: chiang@ece.cornell.edu).

Digital Object Identifier 10.1109/TCSI.2007.910642

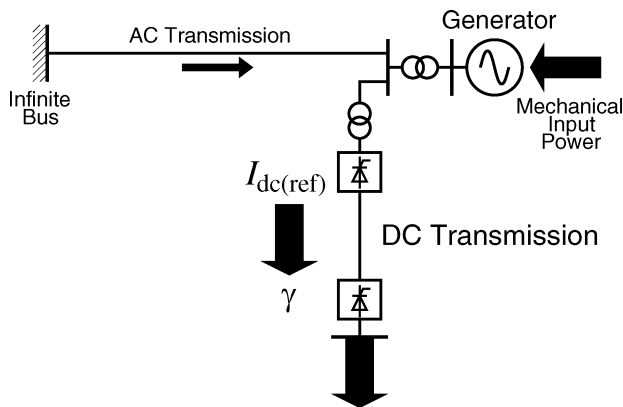


Fig. 1. Electric power system with dc transmission.

has been reported. Sastry and Varaiya [26] analyze such discontinuity appearing in transient stability analysis. Chu [9] investigates detailed features of discontinuous solutions and calls them *external jumps*. *Zho et al.* [27] propose a controlling unstable equilibrium point (UEP) method for transient stability analysis with considering external jumps. We apply the above results to analysis of a practical ac/dc power system.

This paper is organized as follows. Section II introduces a DAE system for transient stability analysis of an ac/dc power system and provides some remarks on the DAE system. In Sections III and IV, discontinuous solutions of the DAE system are addressed numerically and analytically. Section III exhibits several numerical results of discontinuous solutions and shows an application limit of the DAE model for transient stability analysis. Section IV examines the discontinuous solutions using singular perturbation, thereby validating them analytically. Section V numerically investigates transient stability of the ac/dc power system through discontinuous solutions. Section VI provides several interpretations of discontinuous transient dynamics of the ac/dc power system and transient stabilization via dc link. Section VII concludes this paper with a summary and future directions.

## II. DAE SYSTEM

This section presents a model system of electric power systems with dc transmission and a DAE system for its transient stability analysis. Some remarks of the DAE system are also presented.

### A. Model System and Mathematical Formulation

Fig. 1 shows a model configuration of electric power systems with dc transmission. The model consists of single synchronous generator-infinite bus system and one dc link which is connected onto the bus of synchronous generator. An infinite bus is a source of voltage constant in phase, magnitude, and frequency and is not affected by the amount of current withdrawn from it [7]. The simple configuration of Fig. 1 is based on a practical power system in Japan [6]. This paper investigates transient stability of the ac/dc power system, i.e., electro-mechanical dynamics of the synchronous generator following an accidental fault.

The following DAE system is derived in [21]–[23] as a mathematical model for transient stability analysis of the ac/dc power system in Fig. 1:

$$\left\{ \begin{array}{l} \frac{T'_{d0}}{L_d - L'_d} \frac{dv'_q}{dt} = \frac{V_0}{L_d - L'_d} + \frac{v_r}{L'_d} \cos \delta_r - \frac{L_d}{L'_d(L_d - L'_d)} v'_q \\ \frac{d\delta}{dt} = \omega \\ 2H \frac{d\omega}{dt} = -D\omega + p_m \\ \quad - \left( \frac{v'_q v_r}{L'_d} \sin \delta_r + \frac{v_r^2}{2} \frac{L'_d - L_q}{L'_d L_q} \sin 2\delta_r \right) \\ L_{dc} \frac{dI_{dc}}{dt} = -R_{dc} I_{dc} + K_V (v_r \cos \alpha - V_i \cos \gamma) \\ 0 = \left( \frac{v'_q v_r}{L'_d} \sin \delta_r + \frac{v_r^2}{2} \frac{L'_d - L_q}{L'_d L_q} \sin 2\delta_r \right) \\ \quad + \frac{v_r V_\infty}{L_\infty} \sin(\delta_r - \delta) - K_I v_r I_{dc} \cos \varphi_r \\ 0 = \left( \frac{v'_q v_r}{L'_d} \cos \delta_r - \frac{v_r^2}{2} \frac{L'_d + L_q}{L'_d L_q} \right. \\ \quad \left. + \frac{v_r^2}{2} \frac{L'_d - L_q}{L'_d L_q} \cos 2\delta_r \right) \\ \quad + \left\{ \frac{v_r V_\infty}{L_\infty} \cos(\delta_r - \delta) - \frac{v_r^2}{L_\infty} \right\} \\ \quad - K_I v_r I_{dc} \sin \varphi_r \\ 0 = K_I v_r I_{dc} \cos \varphi_r \\ \quad - \left( K_V v_r \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right) I_{dc} \end{array} \right. \quad (1)$$

where

$$\alpha = G_\alpha (I_{dc(\text{ref})} - I_{dc}). \quad (2)$$

The physical meaning of variables and parameters is shown in Table I. All variables and parameters of the DAE system (1) are in per unit except for angles which are in radians.  $v_r$  and  $\delta_r$  are defined as

$$e_d = v_r \sin \delta_r, \quad e_q = v_r \cos \delta_r \quad (3)$$

where  $e_d$  and  $e_q$  denote  $d$  axis and  $q$  axis voltages of the generator terminal.  $v_r$  therefore stands for the terminal voltage at the generator bus. It is here assumed that the value of terminal voltage is positive, that is,  $v_r > 0$ . The assumption is valid for the practical power system. The direct product set  $X \times Y$  of variables in the DAE system (1) is defined as  $X \triangleq \mathbb{R} \times \mathbb{S}^1 \times \mathbb{R} \times \mathbb{R} \ni (v'_q, \delta, \omega, I_{dc})^T$  and  $Y \triangleq \{v_r | v_r > 0\} \times \mathbb{S}^1 \times \mathbb{S}^1 \ni (v_r, \delta_r, \varphi_r)^T$ . The symbol  $T$  denotes the transpose operation of vectors.

The DAE system (1) is, needless to say, a combination of differential and algebraic equations. The first differential equation stands for dynamics of flux decay in the generator. The second and third equations show electromechanical dynamics of the generator, called the swing equation. The fourth equation denotes dynamics of dc current which is represented by

Kirchhoff's current law. The equation for dc current includes basic control setup of dc link: an automatic current regulation (ACR) scheme for rectifier and automatic margin angle regulation ( $A\gamma R$ ) scheme for inverter. On the other hand, the first and second algebraic equations represent active and reactive power balance in the ac power system. The last equation denotes active power relationship between the ac power system and the dc link.

Next, we rewrite the DAE system (1) via the structure preserving model [28]. The following transformation reveals analytical features of transient stability of the ac/dc power system in Sections IV–VI. A variable transformation from  $(v_r, \delta_r)$  to  $(\theta_r, V_r)$  is introduced as

$$\theta_r \triangleq \delta - \delta_r, \quad V_r \triangleq \ln v_r. \quad (4)$$

The new variable  $\theta_r$  is the phase difference between terminal voltages at generator and infinite buses system. Here, smooth functions  $\mathcal{U}_{ac}(v'_q, \delta, \omega, \theta_r, V_r)$  and  $\mathcal{U}_{dc}(I_{dc})$  are defined as

$$\left\{ \begin{array}{l} \mathcal{U}_{ac} \triangleq -p_m \delta \\ \quad - \frac{(L'_d - L_q) \cos 2(\delta - \theta_r) - (L'_d + L_q) e^{2V_r}}{2L'_d L_q} \frac{e^{2V_r}}{2} \\ \quad - \frac{v'_q e^{V_r}}{L'_d} \cos(\delta - \theta_r) - \frac{e^{V_r} V_\infty}{L_\infty} \cos \theta_r \\ \quad + \frac{e^{2V_r}}{2L_\infty} - \frac{V_0}{L_d - L'_d} v'_q + \frac{L_d}{L'_d(L_d - L'_d)} \frac{v_q'^2}{2} \\ \mathcal{U}_{dc} \triangleq \frac{1}{2} R_{dc} I_{dc}^2. \end{array} \right. \quad (5)$$

The original DAE system (1) is then reformalized as follows:

$$\left\{ \begin{array}{l} \frac{T'_{d0}}{L_d - L'_d} \frac{dv'_q}{dt} = - \frac{\partial \mathcal{U}_{ac}}{\partial v'_q} \\ \frac{d\delta}{dt} = \omega \\ 2H \frac{d\omega}{dt} = -D\omega - \frac{\partial \mathcal{U}_{ac}}{\partial \delta} \\ L_{dc} \frac{dI_{dc}}{dt} = - \frac{\partial \mathcal{U}_{dc}}{\partial I_{dc}} + K_V (e^{V_r} \cos \alpha - V_i \cos \gamma) \\ 0 = - \frac{\partial \mathcal{U}_{ac}}{\partial \theta_r} - K_I e^{V_r} I_{dc} \cos \varphi_r \\ 0 = - \frac{\partial \mathcal{U}_{ac}}{\partial V_r} - K_I e^{V_r} I_{dc} \sin \varphi_r \\ 0 = K_I e^{V_r} I_{dc} \cos \varphi_r \\ \quad - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right) I_{dc}. \end{array} \right. \quad (6)$$

The simple description of transformed DAE system (6) is often used as follows:

$$\left\{ \begin{array}{l} M \frac{d\mathbf{x}}{dt} = \mathbf{f}(\mathbf{x}, \mathbf{y}) \\ \mathbf{0} = \mathbf{g}(\mathbf{x}, \mathbf{y}) \end{array} \right. \quad (7)$$

where  $\mathbf{x} \triangleq (v'_q, \delta, \omega, I_{dc})^T \in X = \mathbb{R} \times \mathbb{S}^1 \times \mathbb{R} \times \mathbb{R}$ ,  $\mathbf{y} \triangleq (\theta_r, V_r, \varphi_r)^T \in \mathbb{S}^1 \times \mathbb{R} \times \mathbb{S}^1$ , and  $\mathbf{f}$  stands for right-hand sides of differential equations in the DAE system (6) and  $\mathbf{g}$  represents

TABLE I  
PHYSICAL MEANING OF VARIABLES AND  
PARAMETERS IN THE DAE SYSTEM (1)

$v'_q$	voltage behind transient reactance
$\delta$	rotor position with respect to synchronous reference axis
$\omega$	rotor speed deviation relative to system angular frequency
$I_{dc}$	dc current: averaged value of current in dc lines
$v_r$	terminal voltage at generator bus
$\delta_r$	angle related to terminal voltage $v_r$ : see eq. (3)
$\varphi_r$	power factor angle of rectifier
$t$	normalized time
$L_d, L_q$	d- and q-axis synchronous reactance
$L'_d$	d-axis transient reactance
$T'_{d0}$	open-circuit transient time constant
$V_0$	field excitation voltage
$p_m$	mechanical input power to generator
$H$	inertia constant
$D$	damping coefficient
$V_\infty$	terminal voltage at infinite bus
$L_{dc}$	reactance of dc lines
$R_{dc}$	resistance of dc lines
$V_i$	terminal voltage at inverter bus
$K_V, K_I$	coupling coefficients of ac and dc transmissions
$X_c$	commutate reactance in rectifier
$G_\alpha$	gain constant of rectifier controller with ACR
$I_{dc}(\text{ref})$	set-point value of rectifier controller with ACR
$\gamma$	margin angle of inverter controller with $A\gamma R$

the right-hand sides of algebraic equations.  $M$  is the positive-definite diagonal matrix

$$M \triangleq \text{diag} \left( \frac{T'_{d0}}{L_d - L'_d}, 1, 2H, L_{dc} \right). \quad (8)$$

## B. Remarks

The mathematical formulation of transient stability in ac/dc power systems via DAEs is not new. Various DAEs have been used for stability analysis of power systems, e.g., [25], [26], [28]–[35]. The previous works present some basic characteristics of DAEs, with which the DAE system (1) can be examined analytically. Several researchers have also modeled the dynamics of ac/dc power systems via DAEs. Padiyar *et al.* [1], [19] derive a structure preserving model for transient stability analysis of ac/dc power systems. Cañizares *et al.* [36] also use a DAE-based voltage stability model for ac/dc power systems.

The model used in this paper is a simplified one, because only constant dc current control and margin angle one are adopted, when in reality there are also firing and extinction angle controls and VDCOL scheme [1], [2]. It is now necessary to consider whether the DAE system (1) is applicable to analysis of the ac/dc power system. Peterson *et al.* [14] note that there are the two main different points of the analysis of ac/dc power systems from those of ordinary ac power systems.

- 1) Transients on the dc line are of a much lower frequency than those on the ac line because of the large inductances

connected in the dc line. Therefore, they should be considered when the transient stability of the composite system is studied.

- 2) The speed of response of the dc control equipment can be expected to be faster by orders of magnitude, when compared with the power-swing. (The possibility of inverter commutation failure should also be taken into account.)

Through the above two points, we now consider whether the DAE-based model is tractable for the present analysis. The first point is achieved by considering dynamics of dc current. The DAE system (1) includes their mathematical model. Here, transients on ac lines are of a much faster frequency than those of electro-mechanical swing of the generator. Dynamics of the ac transmission can be therefore eliminated. The second point is also implemented by considering control setup of dc link. Equation (2) shows a simple description of ACR scheme. There is also no need to consider a possibility of inverter commutation failure in the ac/dc power system, because dynamics of ac power systems on the inverter side is not modeled in Fig. 1. Here, time frame of transient stability is from around a second to several seconds [7]. Interrupted voltage and current by ac/dc converters can be therefore expressed with these time-averaged values, which are used in the DAE system (1). Transient dynamics of the ac/dc power system can be hence modeled using the DAE system (1).

### III. NUMERICAL SIMULATIONS OF DISCONTINUOUS SOLUTIONS

This section exhibits several discontinuous solutions of the DAE system (1). Two fault conditions in the ac power system are fixed for numerical simulations. The concepts of discontinuous solutions are also reviewed.

#### A. Fault Conditions and External Jumps

Two fault conditions for numerical simulations are as follows. One is a three-phase fault in the ac transmission, and the generator as a result operates onto only the dc link during the fault duration. The other is a three-phase fault near the infinite bus, and thereby the infinite bus voltage is fixed at zero during the fault duration. Suppose that all variables of the DAE system (1) are at a known stable equilibrium point (EP) at time  $t = 0^-$ . This implies that the ac/dc power system exists on a steady state at time  $t = 0^-$ . Also suppose that a large fault occurs at time  $t = 0$  and that the fault is cleared at time  $t = t_{cl}(> 0)$  by system operation such as protective relay. The fault duration is confined to the time interval  $[0^+, t_{cl}^-]$ . It is also assumed for simplicity that the pre-fault and post-fault DAE systems are consistent. Thus, the above two fault conditions can be formulated during the time interval  $[0^+, t_{cl}^-]$  using the ac line reactance  $L_\infty$  and the infinite bus voltage  $V_\infty$  as follows:

$$\begin{cases} \frac{1}{L_\infty} = 0 : \text{case-1} \\ V_\infty = 0 : \text{case-2.} \end{cases} \quad (9)$$

Two constraint sets are apparently different between the pre-fault (or post-fault) and fault-on DAE systems. The difference is the origin of discontinuous solutions in the DAE system (1) at time  $t = 0$  and  $t_{cl}$ . They are called external jumps [9] and

TABLE II  
PARAMETER SETTING IN THE DAE SYSTEM (1)

$L_d$	1.79	$L_q$	1.77	$L'_d$	0.34
$T'_{d0}/(120\pi \text{ s}^{-1})$	6.3 s	$V_0$	1.7	$p_m$	0.5
$H/(120\pi \text{ s}^{-1})$	0.89 s	$D$	0.05	$L_\infty$	0.883
$V_\infty$	1.0	$L_{dc}$	4.2	$R_{dc}$	0.014
$V_i$	1.0	$K_V$	1.19	$K_I$	1.19
$X_c$	0.12	$G_\alpha$	30.0	$I_{dc(\text{ref})}$	1.0
$\gamma$	23.0 deg				

have been discussed for power system models [9], [26], [27]. The external jumps are qualitatively different from jump behavior caused by singularity [37], [38]. The previous works [9], [26] characterize the discontinuous solutions via boundary layer (BL) systems. The following sections use some of the previous results to validate numerical external jumps of the DAE system (1).

Note that actual power systems do not hold such discontinuous states and that they therefore originate from modeling overabstraction. However, it should be emphasized that the analysis of ideal discontinuous solutions is of great significance due to the two facts. One is that in actual power systems rapid change of power flows by protective relay operations is often observed. Such rapid dynamics can be approximately modeled with the discontinuous solutions. The other is related to computational aspects of power system analysis. Abstraction is an inevitable task for computer-aided analysis of massively complex power systems. As stated above, general DAEs provide a fruitful mathematical model for power system transient stability analysis. Understanding the discontinuous solutions is therefore important from both the phenomenological and engineering points of view.

#### B. Numerical Simulations

Numerical simulations are performed for the above two fault conditions. Table II shows the parameter setting in the DAE system (1).  $L_\infty$  and  $V_\infty$  in Table II are adopted except the fault duration  $[0^+, t_{cl}^-]$ . The parameters are obtained for a practical power system [6]. This paper adopts the third-stage Radau-IIA implicit Runge–Kutta method [39] to integrate the DAE system numerically.

Fig. 2 shows the transient behavior of  $\omega$ ,  $I_{dc}$ , and  $V_r$  with case-1 fault condition. The fault clearing time is 8 cycle of a 60-Hz sine wave:  $t_{cl}/(120\pi \text{ s}^{-1}) = 8/(60 \text{ Hz})$ . The solution converges to a post-fault stable EP as time passes. In Fig. 2,  $\omega$  and  $I_{dc}$  in the variable  $\mathbf{x}$  of differential equations are continuous. On the other hand,  $V_r$  in the variable  $\mathbf{y}$  of algebraic equations is discontinuous at  $t/(120\pi \text{ s}^{-1}) = 0 \text{ s}$  and  $8/(60 \text{ Hz})$ . The distinctive feature of continuity is clarified via singular perturbation in Section IV.

Fig. 2 also describes the active and reactive power swing of generator and infinite bus outputs, and dc input. The active and reactive power also includes the discontinuous points at  $t/(120\pi \text{ s}^{-1}) = 0 \text{ s}$  and  $8/(60 \text{ Hz})$ . During the fault duration, the active power output from infinite bus is zero. The active power output from generator and input to dc link are therefore consistent. Since the active power output from generator during the



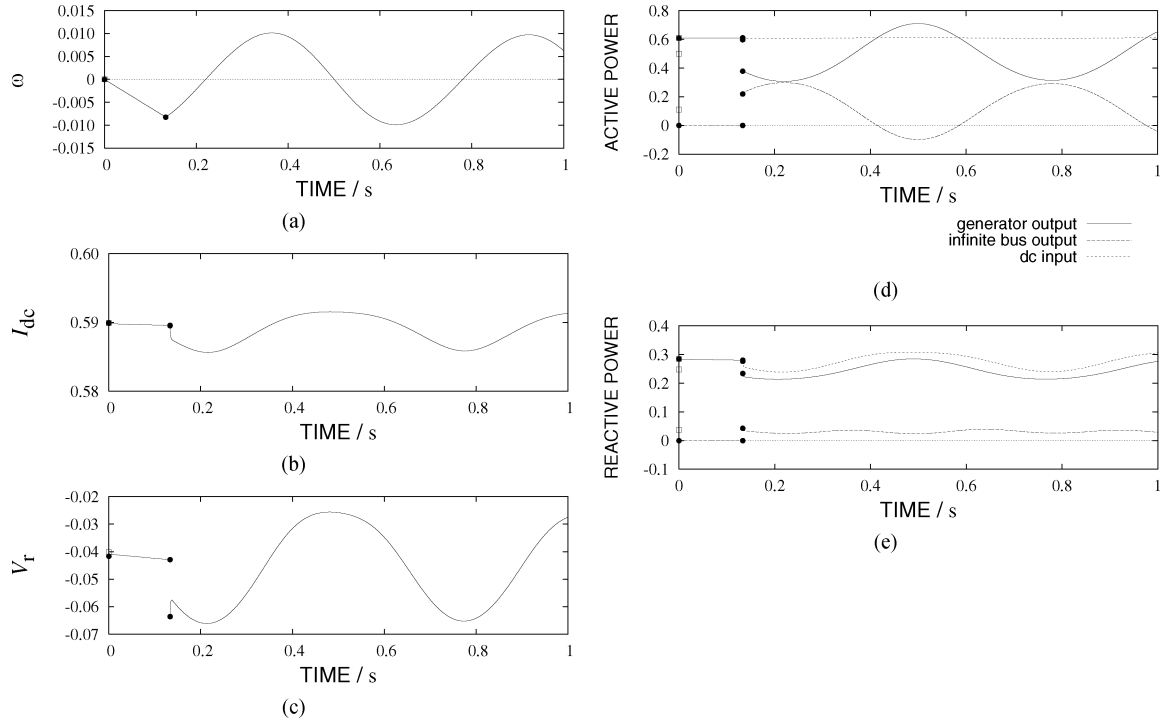


Fig. 2. Discontinuous solution of the DAE system (1) with case-1 fault condition. The fault-clearing time  $t_{cl}/(120\pi \text{ s}^{-1})$  is fixed at  $8/(60 \text{ Hz})$ . The solution converges to a post-fault stable equilibrium point (EP) as time passes. (a) Rotor speed deviation  $\omega$ . (b) DC current  $I_{dc}$ . (c)  $V_r = \ln v_r$  for terminal voltage  $v_r$ . (d) Active power. (e) Reactive power.

fault duration is greater than that at the pre-fault time, the generator is decelerated in Fig. 2(a). After the fault is cleared at  $t = t_{cl}$ , both the active power output from generator and infinite bus shows oscillatory motions and converges to constant values at the stable EP. Here it should be noted that rapid transients of active and reactive power are reported in [14] with numerical simulations of detailed model of an ac and dc parallel transmission system. These rapid transients are well approximated by the discontinuous solutions presented here.

Fig. 3 shows the transient behavior with case-2 fault condition. The solution converges to the singular surface [40] of fault-on DAE system in a finite time. For the system (7), the singular surface  $S$  is defined as

$$S \triangleq \{(\mathbf{x}, \mathbf{y}) \in X \times Y \mid \mathbf{g}(\mathbf{x}, \mathbf{y}) = \mathbf{0} \\ \det(\mathbf{D}_y \mathbf{g})(\mathbf{x}, \mathbf{y}) = 0\}. \quad (10)$$

The solution which reaches the singular surface becomes possibly discontinuous [37], [38]. The discontinuity here is qualitatively different from external jumps [9] and implies the loss of causality of the DAE system as a power system model [30], [31]. On the singular surface we cannot predict transient stability of the ac/dc power system by the DAE system (1). The transient behavior in Fig. 3 therefore suggests that the present DAE system (1) is not relevant to clarifying the transient stability with respect to case-2 fault condition. This shows an application limit of the DAE system (1) for transient stability analysis.

Note that the simulations above are some examples of discontinuous solutions in the DAE system (1). The behavior of discontinuous solutions qualitatively changes depending on fault

conditions which include initial states and parameters. The following sections discuss some aspects of global nature of the discontinuous solutions with application to validation of numerical solutions and analysis of transient stabilization via dc link.

#### IV. ANALYTICAL VALIDATION OF DISCONTINUOUS SOLUTIONS

The preceding section numerically showed several discontinuous solutions of the DAE system (1). This section validates the numerical solution with case-1 fault condition from an analytical point of view. The validation is performed using singular perturbation technique and BL formulation.

##### A. Singular Perturbation Approach

The discontinuous solution in Fig. 2 is considered using singular perturbation. The corresponding singularly perturbed (SP) system to the DAE system (7) with a small positive parameter  $\varepsilon$  is introduced

$$\begin{cases} M \frac{d\mathbf{x}}{dt} = \mathbf{f}(\mathbf{x}, \mathbf{y}) \\ \varepsilon \frac{d\mathbf{y}}{dt} = \mathbf{g}(\mathbf{x}, \mathbf{y}). \end{cases} \quad (11)$$

Dynamics of the SP system (11) has the similarity to those of the transformed DAE system (7) in some conditions and of the original DAE system (1) with additional assumptions. This important property is well known as Tikhonov's theorem [41]. Fig. 4 shows the projected trajectories of the DAE and corresponding SP systems onto  $\theta_r - V_r$  plane. The perturbation parameter  $\varepsilon$  is fixed at 0.5. Note that trajectories of the SP system at  $\varepsilon = 0.01$  and 0.1 show the same behavior as that at  $\varepsilon = 0.5$ . The solid line is for the DAE system (1): The transformations  $\theta_r = \delta - \delta_r$

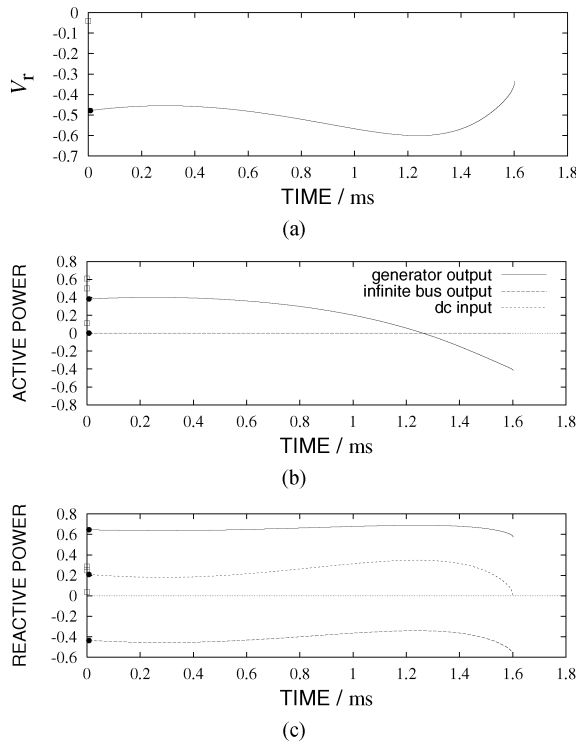


Fig. 3. Discontinuous solution of the DAE system (1) with case-2 fault condition. The solution reaches the singular surface of fault-on DAE system in a finite time. (a)  $V_r = \ln v_r$  for terminal voltage  $v_r$ . (b) Active power. (c) Reactive power.

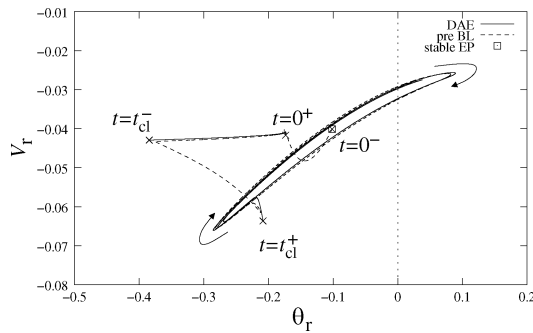


Fig. 4. Projected trajectories of the DAE and SP systems with case-1 fault condition onto  $\theta_r$ - $V_r$  plane. The perturbation parameter  $\varepsilon$  is set at 0.5. The solid line denotes the trajectory of the DAE system (1) shown in Fig. 2, for which the transformations  $\theta_r = \delta - \delta_r$  and  $V_r = \ln v_r$  are used. The broken line shows the trajectory of the SP system (11).

and  $V_r = \ln v_r$  are used. The broken line is for the SP system (11) which initial condition is identical to that for the DAE system (1). Fig. 4 implies that the solution of the SP system (11) traces the discontinuous solution of the DAE system (1). The SP system (11) therefore provides an overall approximation of the discontinuous solution in Fig. 2.

### B. Boundary Layer Approach

Next the external jumps for case-1 fault condition are analytically validated. To confirm the projected discontinuous solution in Fig. 4, the following 2-D BL system is adopted via the

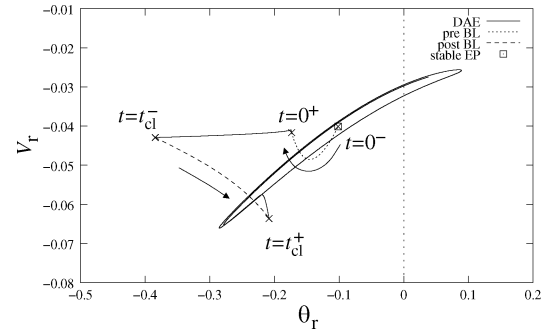


Fig. 5. Projected trajectory of the DAE system, and trajectories of the pre- and post-BL systems with case-1 fault condition. The solid line denotes the trajectory of the DAE system (1) shown in Fig. 2, for which the transformations  $\theta_r = \delta - \delta_r$  and  $V_r = \ln v_r$  are used. The dotted and broken lines show the trajectories of the BL systems (12) at  $t = 0$  and  $t_{cl}$ .

scaling transformation  $s = t/\varepsilon$  and under additional assumptions  $v_r > 0$ ,  $I_{dc} \neq 0$ ,  $\sin \varphi_r > 0$ , and  $K_I > 0$

$$\begin{cases} \frac{d\theta_r}{ds} = -\frac{\partial \mathcal{U}_{ac}}{\partial \theta_r}(v'_q, \delta, \theta_r, V_r) \\ \quad - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right) I_{dc} \\ \frac{dV_r}{ds} = -\frac{\partial \mathcal{U}_{ac}}{\partial V_r}(v'_q, \delta, \theta_r, V_r) \\ \quad - \sqrt{K_I^2 e^{2V_r} - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right)^2} \cdot I_{dc}. \end{cases} \quad (12)$$

The derivation of the BL system (12) is given in Appendix . The variables  $v'_q$ ,  $\delta$ , and  $I_{dc}$  are assumed constant when the variables  $\theta_r$  and  $V_r$  change. The BL system (12) is regarded as a dynamical system that represents dynamics of the variables  $\theta_r$  and  $V_r$ .

A remark on characterization of external jumps is now introduced. It is stated from [9], [26] that if the DAE system (1) admits of an external jump at  $t = t_*$ , then the trajectory of the BL system (12) with the initial point  $(\theta_r(t_*^-), V_r(t_*^-))$  converges to the point  $(\theta_r(t_*^+), V_r(t_*^+))$  as time passes, satisfying  $\mathbf{x}(t_*^-) = \mathbf{x}(t_*^+)$ . This implies that the point  $(\theta_r(t_*^-), V_r(t_*^-))$  is on a stable manifold of the EP  $(\theta_r(t_*^+), V_r(t_*^+))$  in the BL system (12). It also suggests that global phase structures of the BL system play an important role in examining the detailed features of external jumps. In the following, the points  $(\theta_r(t_*^-), V_r(t_*^-))$  and  $(\theta_r(t_*^+), V_r(t_*^+))$  are called the *starting* and *exit* points of external jumps at  $t = t_*$ .

The numerical simulation in Fig. 2 is now reconsidered via the above characterization. The coincident property of the variable  $\mathbf{x}$  holds in Fig. 2(a) and (b) at  $t = 0$  and  $t_{cl}$ . Fig. 5 describes the trajectories of the pre-BL and post-BL systems, and the projected trajectory of the DAE system (1), for which the transformations  $\theta_r = \delta - \delta_r$  and  $V_r = \ln v_r$  are used. The trajectories of the BL systems converge to EPs of the BL systems. The EPs coincide with the exit points of external jumps at  $t = 0$  and  $t_{cl}$ . The analytical characterization hence validates the numerical discontinuous solution including the external jumps.

Note that the global aspect of characterization is not fully used in the above validation. Fig. 5 numerically validates at  $t = 0$  and  $t_{cl}$  that one trajectory of each BL system exists on a stable manifold of each EP. There is no discussion of global

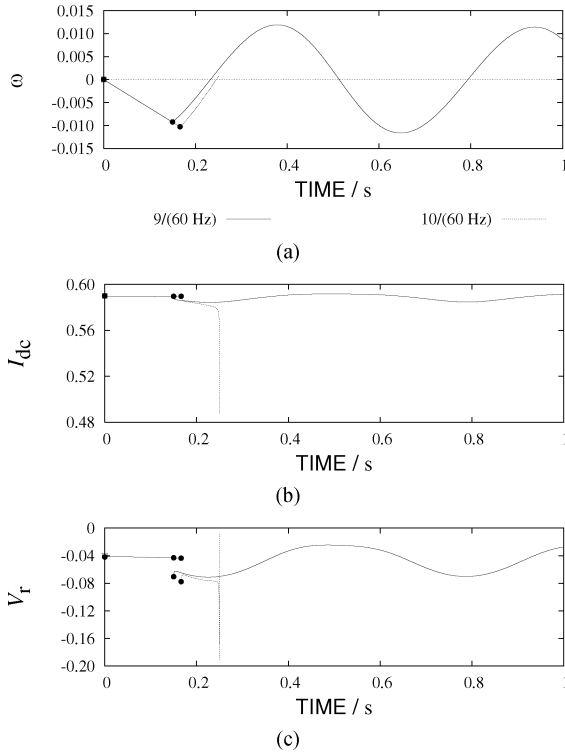


Fig. 6. Discontinuous solutions of the DAE system (1) under  $t_{cl}/(120\pi \text{ s}^{-1}) = 9/(60 \text{ Hz})$  and  $10/(60 \text{ Hz})$  with case-1 fault condition. The discontinuous solution with  $t_{cl}/(120\pi \text{ s}^{-1}) = 9/(60 \text{ Hz})$  converges to a stable equilibrium point as time passes. The discontinuous solution with  $t_{cl}/(120\pi \text{ s}^{-1}) = 10/(60 \text{ Hz})$  reaches the singular surface of the post-fault DAE system in a finite time. (a) Rotor speed deviation  $\omega$ . (b) DC current  $I_{dc}$ . (c)  $V_r = \ln v_r$  for terminal voltage  $v_r$ .

structures of the BL system (12). The global structures are investigated in Section V. The next section numerically shows that all trajectories of the BL system (12) at  $t = t_{cl}$  converge to a common stable EP.

## V. TRANSIENT STABILITY ANALYSIS BASED ON DISCONTINUOUS SOLUTIONS

This section performs transient stability analysis of the ac/dc power system based on discontinuous solutions. As stated above, transient stability is concerned with a power system's ability to reach an acceptable operating condition following an event disturbance. The previous sections investigated several discontinuous solutions and provided some analytical methods for validating them. It is therefore and now possible to examine transient stability of the ac/dc power system through discontinuous solutions. This section investigates the effects of fault clearing time and dc current control on transient dynamics and stability of the ac/dc power system.

### A. Effect of Fault Clearing Time

The effect of fault clearing time  $t_{cl}$  is considered for case-1 fault condition. Fig. 6 shows transient behavior of the DAE system (1) at 9 cycle and 10 cycle of a 60-Hz sine wave:  $t_{cl}/(120\pi \text{ s}^{-1}) = 9/(60 \text{ Hz})$  and  $10/(60 \text{ Hz})$ . The setting of numerical simulations is identical to that in Fig. 2. The discontinuous solution with  $t_{cl}/(120\pi \text{ s}^{-1}) = 9/(60 \text{ Hz})$

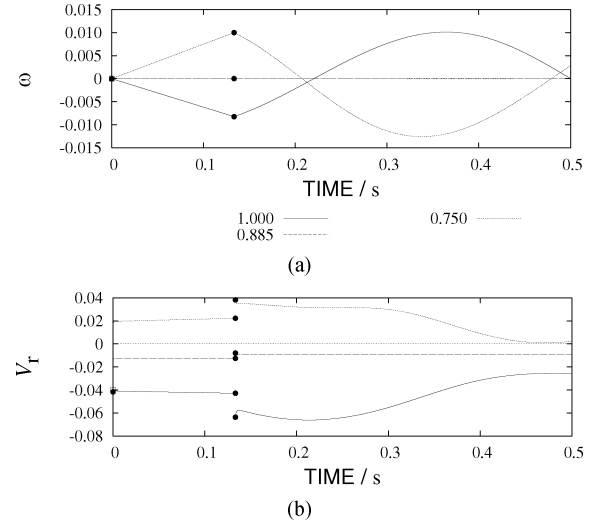


Fig. 7. Discontinuous solutions of the DAE system (1) under  $I_{dc(\text{ref})} = 1.000$ ,  $0.885$ , and  $0.750$  with respect to case-1 fault condition. The fault-clearing time  $t_{cl}/(120\pi \text{ s}^{-1})$  is fixed at  $8/(60 \text{ Hz})$ . The solutions converge to stable EPs of the post-fault DAE system (1) as time passes. The figure shows accelerated state of the generator, almost steady state, and decelerated state, for the decrease of  $I_{dc(\text{ref})}$ . (a) Rotor speed deviation  $\omega$ . (b)  $V_r = \ln v_r$  for terminal voltage  $v_r$ .

converges to a stable EP. This is qualitatively identical to the discontinuous solution with  $t_{cl}/(120\pi \text{ s}^{-1}) = 8/(60 \text{ Hz})$  in Fig. 2. On the other hand, the discontinuous solution with  $t_{cl}/(120\pi \text{ s}^{-1}) = 10/(60 \text{ Hz})$  reaches the singular surface  $S$  of post-fault DAE system in a finite time. This implies that by the DAE system (1) we cannot predict transient stability of the ac/dc power system after the fault clearing, and that the ac/dc power system has a possibility of reaching undesirable operations due to the decrease of dc current and system voltage. Note in [42] that the qualitative difference between the discontinuous solutions originates from stability boundaries of the DAE system (1).

### B. Effect of DC Current Control

Next, the effect of dc current control is addressed. The present investigation is performed for case-1 fault condition. Fig. 7 shows transient behavior of the DAE system (1) under the set-point value  $I_{dc(\text{ref})} = 1.000$ ,  $0.885$ , and  $0.750$ . The behavior is obtained by adopting a stable EP of the pre-fault DAE system as initial condition. The same parameter setting is also used as in Fig. 2. The solutions converge to stable EPs. That is, the generator settles down an acceptable operating condition for case-1 fault condition. The transient behavior in Fig. 2 shows accelerated state of the generator, almost steady state, and decelerated state, for the decrease of  $I_{dc(\text{ref})}$ . The dc current control hence affects transient dynamics of the overall power system.

Section IV mentioned that phase portraits of the BL system (12) characterized the detailed features of external jumps. Now the relationship between the effect of dc current control and phase portraits of the post-fault BL system (12) is considered. Fig. 8 shows phase portraits of the post-fault BL system (12) under  $I_{dc(\text{ref})} = 1.000$ ,  $0.885$ , and  $0.750$  with case-1 fault condition. Every phase portrait has one EP which corresponds to an exit point of external jump at  $t_{cl}/(120\pi \text{ s}^{-1}) = 8/(60 \text{ Hz})$ . All



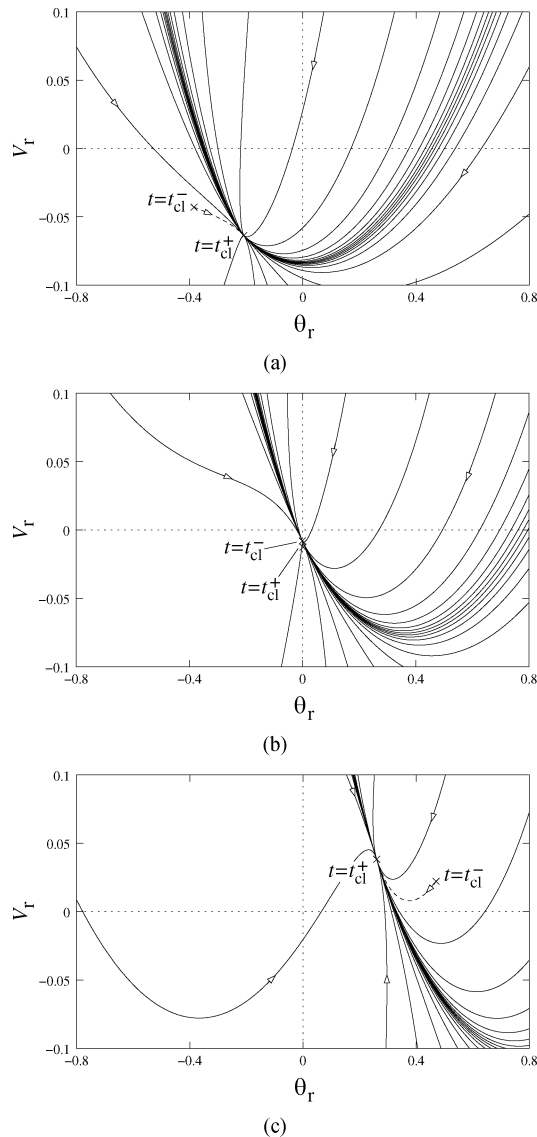


Fig. 8. Phase portraits of the post-BL system (12) under  $I_{dc(ref)} = 1.000$ ,  $0.885$ , and  $0.750$  with respect to case-1 fault condition. The fault clearing time  $t_{cl}/(120\pi \text{ s}^{-1})$  is fixed at  $8/(60 \text{ Hz})$ . Every broken line shows the important trajectory which connects the starting and exit points of external jumps. All the trajectories in the figure converge to the EPs of the post-fault BL system as time passes. (a)  $I_{dc(ref)} = 1.000$ . (b)  $I_{dc(ref)} = 0.885$ . (c)  $I_{dc(ref)} = 0.750$ .

trajectories in Fig. 8 converge to the EPs as time passes. Every *broken* line shows the important trajectory which connects the starting and exit points of external jumps. In Fig. 8(b) the starting and exit points are almost same, and the corresponding transient behavior in Fig. 7 does not therefore show any oscillatory motion after the fault clearing. The phase portraits hence show the effect of dc current control to external jumps. This provides an analytical clue to considering transient stabilization via dc link in Section VI.

## VI. DISCUSSION

Sections III–V showed several numerical and analytical results on discontinuous solutions in the DAE system (1). Through the discontinuous solutions, we offer mathematical and physical explanations of transient dynamics and stability of the ac/dc power system.

### A. Analytical Description of Installation of DC Link

This paper uses a DAE-based model on transient dynamics of the ac/dc power system. The used model offers an analytical viewpoint about the installation of dc link into ac power system. Both the original DAE system (1) and the transformed one (6) imply that dynamics of the ac power system and the dc link interacts each other through active and reactive power relations. Here, without the interaction, in other words,  $K_V = K_I = 0$ , the transformed DAE system (6) implies that dynamics of the ac power system is represented by a gradient-like system. The function  $\mathcal{U}_{ac}(v'_q, \delta, \omega, \theta_r, V_r)$  becomes a candidate of energy function [28], [40] which leads to characterization of stability boundaries of the ac power system. Hence, from the transformed DAE system (6), the installation of dc link into ac power system is mathematically represented by a perturbation to the gradient-like system. This analytical viewpoint is held for general ac/dc composite power systems, because their dynamics can be also represented by DAE systems with structure preserving model [28].

### B. Mechanism of Discontinuous Solutions

Section III gave several numerical results on discontinuous solutions. The origin of discontinuous dynamics is physically conservation law of power and is mathematically a set of algebraic equations. The DAE system (1) contains active and reactive power relations which are described by the algebraic equations. The power relations stem from the conservation law of active and reactive power at the connecting point of ac power system and dc link. At the onset of fault occurrence, the conservation law of power is held; on the other hand, the network topology of ac/dc power system instantaneously changes. Both these properties are compatible if the algebraic equations instantaneously change at the onset of fault occurrence. This is why the discontinuity of solutions occurs in the DAE system (1).

### C. Geometry of Transient Stabilization via DC Link

Section V discussed the effect of dc current control via the BL system (12). The phase portraits in Section V offer a dynamical viewpoint about the transient stabilization of ac power systems via dc link. Fig. 8 implies that the effect of dc current control appears in phase portraits of the BL system (12). Assigning the phase portraits is therefore a key to regulating transient behavior of the ac power system. Here, if the ac power system and the dc link do not interact, in other words,  $K_V = K_I = 0$ , then the BL system for the ac power system becomes a gradient system with a potential function  $U_{ac}(\theta_r, V_r)$ . The system is operationally derived by putting  $K_V = K_I = 0$  and  $X_c = 0$  in the BL system (12). The installation of dc link into ac power system is therefore regarded as a perturbation of the gradient BL system. Namely, the transient stabilization via dc link can be investigated using the gradient controlled BL system with input as installation of dc link. This provides a dynamical viewpoint about the transient stabilization.

Note that transient stabilization via dc links is reported in [10]–[13] and is adopted in practical power systems [1], [2]. Unfortunately, the mechanism of stabilization has been not analytically clarified. Fig. 8 also implies that transient behavior of

the ac power system is regulated by changing the set-point value  $I_{dc(ref)}$  of dc current. The set-point value  $I_{dc(ref)}$  is one control parameter that is included in the algebraic equations. Hence, it is said that the transient stabilization is the regulation of the constraint set, which is a set of variables satisfying algebraic equations, in the DAE system (1). Fig. 8 describes one aspect of regulating the constraint set through the BL formulation.

#### D. Comments to General AC/DC Power Systems

Last of all, generalization of the obtained results on a practical ac/dc power system is discussed for two different points. The first point is for general ac/dc power systems containing many synchronous machines and dc links. The general systems show the similar discontinuous dynamics, because their dynamics is analyzed by general DAE systems [16]–[19]. The discontinuity of solutions provides the same analytical viewpoint about transient stabilization via dc links as the ac/dc power system in Fig. 1. The second point is whether the analytical viewpoint based on the simplified model is valid if detailed models of dc controllers are considered such as firing angle controls and VDCOL scheme. An integrated model of transient dynamics is then required to investigate this point. The integrated model is represented by a hybrid dynamical system, because it contains both continuous dynamics of generator/transmissions and discrete events of firing control. Understanding the connection of simplified and hybrid models is therefore central to solving the second point. This is our forthcoming work which is also mentioned in Section VII.

### VII. CONCLUSION

This paper studied discontinuous transient dynamics of an electric power system with dc transmission. The analysis was numerically and analytically performed based on a DAE system. Several discontinuous solutions were numerically presented for concrete fault conditions and were analytically validated using singular perturbation. These results exhibit an example of discontinuous solutions of the DAE system (1) and imply that they can be handled numerically and analytically. Transient stability analysis based on discontinuous solutions was also performed. Through the analysis, we show that transient stabilization via dc transmission is characterized by a dynamical system on constraint set or manifold controlled by input as installation of dc transmission.

Many research subjects follow the present study on discontinuous dynamics of the ac/dc power system. As mentioned in Section III, the DAE-based model has great importance for stability analysis of power systems. An energy function method for DAE-based power system models has been developed in [8], [9], [27], [34]. A controlling UEP method with considering the discontinuous solutions is particularly proposed in [27]. This paper provides some characteristics of discontinuous solutions for the DAE system (1). Applying the proposed method in [27] to the ac/dc power system is therefore a next work. The application depends on how an energy function is constructed for the DAE system (1).

Transient discontinuous dynamics is analyzed from a viewpoint of *hybrid systems*. Hybrid systems are interacting dynamical systems of continuous and discrete-valued variables. Analysis and control of hybrid systems have recently attracted a lot of interest of many researchers: see e.g., [43]. Again note that discontinuous solutions in the DAE system (1) occur when network topology of the ac/dc power system changes due to fault occurrence and clearing. The topology change is modeled as a map of discrete-valued variables in hybrid systems: see [44] for modeling hybrid voltage dynamics in a power system. Hybrid system-based models can also combine the simplified model and detailed one of dc controllers such as firing angle controls and VDCOL scheme. Analysis of discontinuous solutions based on hybrid systems theory is of great importance for not only validating the obtained results in real situation of ac/dc power systems but also exploring stability problems of complex power networks.

#### APPENDIX

##### DERIVATION OF BOUNDARY LAYER SYSTEM

This appendix derives the 2-D BL system (12). To do this, a reduced DAE system is first induced. From the last equation of (6) and trigonometric functions, the following equalities are derived:

$$\begin{cases} K_I e^{V_r} I_{dc} \cos \varphi_r = \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right) I_{dc} \\ K_I I_{dc} e^{V_r} \sin \varphi_r = \sqrt{K_I^2 e^{2V_r} - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right)^2} \cdot I_{dc} \end{cases} \quad (13)$$

where it is here assumed that  $I_{dc} \neq 0$ ,  $\sin \varphi_r > 0$ , and  $K_I > 0$  in the DAE system (6). This is relevant to considering the transient stability of the practical ac/dc power system. Substituting (13) to (6) makes it possible to eliminate the variable  $\varphi_r$  from the DAE system (6). Thus, the following reduced DAE system is derived:

$$\begin{cases} \frac{T'_{d0}}{L_d - L'_d} \frac{dv'_q}{dt} = -\frac{\partial \mathcal{U}_{ac}}{\partial v'_q} \\ \frac{d\delta}{dt} = \omega \\ 2H \frac{d\omega}{dt} = -D\omega - \frac{\partial \mathcal{U}_{ac}}{\partial \delta} \\ L_{dc} \frac{dI_{dc}}{dt} = -\frac{\partial \mathcal{U}_{dc}}{\partial I_{dc}} + K_V (e^{V_r} \cos \alpha - V_i \cos \gamma) \\ 0 = -\frac{\partial \mathcal{U}_{ac}}{\partial \theta_r} - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right) I_{dc} \\ 0 = -\frac{\partial \mathcal{U}_{ac}}{\partial V_r} \\ \quad - \sqrt{K_I^2 e^{2V_r} - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right)^2} \cdot I_{dc} \end{cases} \quad (14)$$

where

$$\mathbf{x} = (v'_q, \delta, \omega, I_{dc})^T \in X = \mathbb{R} \times \mathbb{S}^1 \times \mathbb{R} \times (\mathbb{R} \setminus \{I_{dc} \mid I_{dc} = 0\})$$

$\mathbf{y} = (\theta_r, V_r)^T \in Y = \mathbb{S}^1 \times \mathbb{R}$ . It should be noted that dynamics of the reduced DAE system (14) is identical to that of the DAE system (6) under the conditions  $I_{dc} \neq 0$ ,  $\sin \varphi_r > 0$ , and  $K_I > 0$ .

0. In addition, by introducing a small positive parameter  $\varepsilon$ , the corresponding SP system is derived

$$\left\{ \begin{array}{l} \frac{T'_{d0}}{L_d - L'_d} \frac{dv'_q}{dt} = -\frac{\partial \mathcal{U}_{ac}}{\partial v'_q} \\ \frac{d\delta}{dt} = \omega \\ 2H \frac{d\omega}{dt} = -D\omega - \frac{\partial \mathcal{U}_{ac}}{\partial \delta} \\ L_{dc} \frac{dI_{dc}}{dt} = -\frac{\partial \mathcal{U}_{ac}}{\partial I_{dc}} + K_V(e^{V_r} \cos \alpha - V_i \cos \gamma) \\ \varepsilon \frac{d\theta_r}{dt} = -\frac{\partial \mathcal{U}_{ac}}{\partial \theta_r} - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right) I_{dc} \\ \varepsilon \frac{dV_r}{dt} = -\frac{\partial \mathcal{U}_{ac}}{\partial V_r} \\ -\sqrt{K_I^2 e^{2V_r} - \left( K_V e^{V_r} \cos \alpha - \frac{3}{\pi} X_c I_{dc} \right)^2} \cdot I_{dc} \end{array} \right. \quad (15)$$

Applying the variable transformation  $1/s = \varepsilon/t$  to the SP system (15) and freezing  $\varepsilon = 0$  induce the 2-D BL system (12).

#### ACKNOWLEDGMENT

Y. Susuki and T. Hikiyara greatly appreciate the fruitful discussion with Prof. P. Holmes, Princeton University, Princeton, NJ, and Prof. T. Funaki, Kyoto University, Kyoto, Japan. The authors are also grateful to anonymous reviewers for their valuable and critical comments.

#### REFERENCES

- [1] K. R. Padiyar, *HVDC Power Transmission Systems: Technology and System Interactions*. New Delhi, India: Wiley Eastern, 1990.
- [2] T. Machida, Ed., *DC Transmission Engineering* (in Japanese). Tokyo, Japan: Tokyo Denki University Press, 1999.
- [3] T. J. Hammons, D. Woodford, J. Loughtan, M. Chamia, J. Donahoe, D. Povh, B. Bisewski, and W. Long, "Role of hvdc transmission in future energy development," *IEEE Power Energy Mag.*, vol. 20, no. 2, pp. 10–15, Feb. 2000.
- [4] D. Povh, "Use of HVDC and FACTS," *Proc. IEEE*, vol. 88, no. 2, pp. 235–245, Feb. 2000.
- [5] B. Anderson and C. Barker, "A new era in HVDC?," *IEE Rev.*, vol. 46, no. 2, pp. 33–39, Mar. 2000.
- [6] Y. Sekine, S. Kato, T. Motoki, and S. Ito, "Kii channel HVDC link between Shikoku and Kansai electric power companies by submarine cables," in *Proc. CIGRE Symp.*, Tokyo, Japan, 1995, #220–04.
- [7] E. W. Kimbark, *Power System Stability*. New York: Wiley, 1947, vol. I.
- [8] H. D. Chiang, "Power system stability," in *Wiley Encyclopedia of Electrical and Electronics Engineering*, J. G. Webster, Ed. New York: Wiley, 1999, pp. 105–137.
- [9] C. C. Chu, "Transient dynamics of electric power systems: direct stability assessment and chaotic motions," Ph.D. dissertation, Cornell University, Ithaca, NY, 1996.
- [10] T. Machida, "Improving transient stability of ac system by joint usage of dc system," *IEEE Trans. Power App. Syst.*, vol. PAS-85, no. 3, pp. 226–232, Mar. 1966.
- [11] P. K. Dash, B. Puthal, O. P. Malik, and G. S. Hope, "Transient stability and optimal control of parallel a.c.-d.c. power systems," *IEEE Trans. Power App. Syst.*, vol. PAS-95, pp. 811–820, May/Jun. 1976.
- [12] N. A. Vovos and G. D. Galanos, "Transient stability of ac-dc systems," *IEEE Trans. Power App. Syst.*, vol. PAS-98, no. 4, pp. 1375–1383, Jul./Aug. 1979.
- [13] N. A. Vovos and G. D. Galanos, "Enhancement of the transient stability of integrated ac/dc systems using active and reactive power modulation," *IEEE Trans. Power App. Syst.*, vol. PAS-104, no. 7, pp. 1696–1702, Jul. 1985.
- [14] H. A. Peterson, D. K. Reitan, and A. G. Phadke, "Parallel operation of ac and dc power transmission," *IEEE Trans. Power App. Syst.*, vol. PAS-84, no. 1, pp. 15–19, Jan. 1965.
- [15] H. A. Peterson, J. P. C. Krause, J. F. Luini, and C. H. Thomas, "An analog computer study of a parallel ac and dc power system," *IEEE Trans. Power App. Syst.*, vol. PAS-85, no. 3, pp. 191–209, Mar. 1966.
- [16] M. A. Pai, K. R. Padiyar, and C. Radhakrishna, "Transient stability analysis of multi-machine ac/dc power systems via energy-function method," *IEEE Trans. Power App. Syst.*, vol. PAS-100, no. 12, pp. 5027–5035, Dec. 1981.
- [17] Y. X. Ni and A. A. Fouad, "A simplified two-terminal hvdc model and its use in direct transient stability assessment," *IEEE Trans. Power Syst.*, vol. PWR-2, no. 4, pp. 1006–1012, Nov. 1987.
- [18] C. L. DeMarco and C. A. Cañizares, "A vector energy function approach for security analysis of ac/dc systems," *IEEE Trans. Power Syst.*, vol. 7, no. 3, pp. 1001–1011, Aug. 1992.
- [19] K. R. Padiyar and H. S. Y. Sastry, "A structure-preserving energy function for stability analysis of ac/dc systems," *Sādhanā: Academy Proc. Eng. Sci.*, vol. 18, no. 5, pp. 787–799, Sep. 1993.
- [20] Y. Susuki and T. Hikiyara, "Transient dynamics of electric power system with dc transmission: Fractal growth in stability boundary," *Proc. IEE Circ. Dev. Syst.*, vol. 152, no. 2, pp. 159–164, Apr. 2005.
- [21] Y. Susuki and T. Hikiyara, "Stability region in electric power system with dc transmission based on differential-algebraic equation," in *Proc. 37th Int. Univ. Power Eng. Conf.*, Stafford, U.K., Sep. 9–11, 2002, vol. 2, pp. 745–749.
- [22] Y. Susuki and T. Hikiyara, "An analysis with differential-algebraic equation in electric power system with dc transmission," in *Proc. IEEE/PES Transm. Distrib. Conf. Exhib. 2002: Asia Pacific*, Yokohama, Japan, Oct. 6–10, 2002, pp. 1933–1936.
- [23] Y. Susuki, T. Hikiyara, and H. D. Chiang, "Stability boundaries analysis of electric power system with dc transmission based on differential-algebraic equation system," *IEICE Trans. Fund. Electr.*, vol. E87-A, no. 9, pp. 2339–2346, Sep. 2004.
- [24] Y. Susuki, T. Hikiyara, and H. D. Chiang, "Transient stability and discontinuous solution in electric power system with dc transmission: A study with DAE system," in *Proc. 2004 Int. Symp. Nonlinear Theory and Its Appl.*, Fukuoka, Japan, Nov. 3, 2004, pp. 423–426.
- [25] A. R. Bergen and D. J. Hill, "A structure preserving model for power system stability analysis," *IEEE Trans. Power App. Syst.*, vol. PAS-100, no. 1, pp. 25–35, Jan. 1981.
- [26] S. Sastry and P. Varaiya, "Hierarchical stability and alert steering control of interconnected power systems," *IEEE Trans. Circuits Syst.*, vol. CAS-27, no. 11, pp. 1102–1112, Nov. 1980.
- [27] Y. Zou, M. H. Yin, and H. D. Chiang, "Theoretical foundation of the controlling UEP method for direct transient-stability analysis of network-preserving power system models," *IEEE Trans. Circuits Syst. I, Fundam. Theory Appl.*, vol. 50, no. 10, pp. 1324–1336, Oct. 2003.
- [28] N. A. Tsolas, A. Arapostathis, and P. P. Varaiya, "A structure preserving energy function for power system transient stability analysis," *IEEE Trans. Circuits Syst.*, vol. CAS-32, no. 10, pp. 1041–1049, Oct. 1985.
- [29] Y. Tamura, H. Mori, and S. Iwamoto, "Relationship between voltage instability and multiple load flow solutions in electric power systems," *IEEE Trans. Power App. Syst.*, vol. PAS-102, no. 5, pp. 1115–1123, May 1983.
- [30] C. L. DeMarco and A. R. Bergen, "Application of singular perturbation techniques to power system transient stability analysis," in *Proc. Int. Symp. Circuits Syst.*, 1984, pp. 597–601.
- [31] H. G. Kwatny, A. K. Pasrija, and L. Y. Bahar, "Static bifurcations in electric power networks: Loss of steady-state stability and voltage collapse," *IEEE Trans. Circuits Syst.*, vol. CAS-33, no. 10, pp. 981–991, Oct. 1986.
- [32] I. A. Hiskens and D. J. Hill, "Energy functions, transient stability and voltage behavior in power systems with nonlinear loads," *IEEE Trans. Power Syst.*, vol. 4, no. 10, pp. 1525–1533, Oct. 1989.
- [33] D. J. Hill and I. M. Y. Mareels, "Stability theory for differential/algebraic systems with application to power systems," *IEEE Trans. Circuits Syst.*, vol. 37, no. 11, pp. 1416–1423, Nov. 1990.
- [34] H. D. Chiang and L. Fekih-Ahmed, "On the direct method for transient stability analysis of power system structure preserving models," in *Proc. Int. Symp. Circuits Syst.*, 1992, pp. 2545–2548.
- [35] V. Venkatasubramanian, H. Schättler, and J. Zaborsky, "Voltage dynamics: Study of a generator with voltage control, transmission, and matched MW load," *IEEE Trans. Autom. Control*, vol. 37, no. 11, pp. 1717–1733, Nov. 1992.

- [36] C. A. Cañizares, F. L. Alvarado, C. L. DeMarco, I. Dobson, and W. F. Long, "Point of collapse methods applied to ac/dc power systems," *IEEE Trans. Power Syst.*, vol. 7, no. 2, pp. 673–683, May 1992.
- [37] F. Takens, "Constrained equations; A study of implicit differential equations and their discontinuous solutions," in *Structural Stability, the Theory of Catastrophes, and Applications in the Sciences*. New York: Springer-Verlag, 1976, vol. 525, Lecture Notes in Mathematics, pp. 143–234.
- [38] S. S. Sastry and C. A. Desoer, "Jump behavior of circuits and systems," *IEEE Trans. Circuits Syst.*, vol. CAS-28, no. 12, pp. 1109–1124, Dec. 1981.
- [39] E. Hairer and G. Wanner, *Solving Ordinary Differential Equations 2. Stiff and Differential-Algebraic Problems*, 2nd ed. Berlin, Germany: Springer-Verlag, 1996, vol. 14, Springer Series in Computational Mathematics.
- [40] V. Venkatasubramanian, H. Schättler, and J. Zaborsky, "Dynamics of large constrained nonlinear systems—A taxonomy theory," *Proc. IEEE*, vol. 83, no. 11, pp. 1530–1561, Nov. 1995.
- [41] H. K. Khalil, *Nonlinear Systems*, 3rd ed. Upper Saddle River, NJ: Prentice-Hall, 2002.
- [42] Y. Susuki, "Transient dynamics and stability boundaries in electric power system with dc transmission," Ph.D. dissertation, Dept. Elect. Eng., Kyoto Univ., Kyoto, Japan, 2004.
- [43] M. Domenica, D. Benedetto, and A. Sangiovanni-Vincentelli, Eds., *Hybrid Systems: Computation and Control*. New York: Springer-Verlag, 2001, Lecture Notes in Computer Science 2034.
- [44] Y. Susuki and T. Hikiara, "Predicting voltage instability of power system via hybrid system reachability analysis," in *Proc. 2007 Amer. Contr. Conf.*, New York, Jul. 11–13, 2007, pp. 4166–4171.



**Yoshihiko Susuki** (S'01–M'05) was born in Japan on December 31, 1977. He received the Bachelor's, Master's, and Ph.D. degrees from Kyoto University, Kyoto, Japan, in 2000, 2002, and 2005, respectively. In 2005, he joined the Department of Electrical Engineering at Kyoto University, where he is an Assistant Professor. In 2003 he was a Visiting Scholar in the School of Electrical Engineering, Cornell University, Ithaca, NY. His research interests include nonlinear dynamics, power system engineering, and control applications.

Dr. Susuki is a member of Institute of Electrical Engineers of Japan (IEEJ), Institute of Electronics, Information and Communication Engineers (IEICE), and Institute of Systems, Control and Information Engineers (ISCIE).

**Takashi Hikiara** (M'85) received the Ph.D. degree from Kyoto University, Kyoto, Japan, in 1990.

In 1987, he joined the faculty of Department of Electrical Engineering, Kansai University, Kansai, Japan. From 1993 to 1994, he was a Visiting Researcher at Cornell University, Ithaca, NY. Since 1997, he has been with the Department of Electrical Engineering, Kyoto University, where he is currently a Professor. His research interests include nonlinear science, analysis of nonlinear system, applications and control of nonlinear dynamics, nanomechanical systems, and power engineering.

Dr. Hikiara is currently an Associate Editor of *Journal of Circuits, Systems, and Computers*. He also served as an Editor of the several special issues of *Transactions of IEICE*, Japan. He is a member of the Institution of Electrical Engineers (IEE), U.K., APS, Society for Industrial and Applied Mathematics (SIAM), Institution of Engineering and Technology (IET), ISICE, and Institute of Electrical Engineers of Japan (IEEJ).

**Hsiao-Dong Chiang** (M'87–SM'91–F'97) received the Ph.D. degree from University of California, Berkeley in 1986.

After receiving the Ph.D. degree in electrical engineering and computer science, he worked on a special project at the Pacific Gas and Electricity Company. In 1987, he joined the faculty of the School of Electrical Engineering at Cornell University, Ithaca, NY. His research interests include nonlinear systems theory, computation, and application to electrical circuits, signals and systems; power system stability and control, security assessments and enhancements; distribution system analysis, control and design; intelligent information processing system; drawing digitization and automated mapping/facility management; and global optimization techniques and applications. He holds five U.S. patents and several consultant positions.

Dr. Chiang was a recipient of an Engineering Research Initiation Award from the National Science Foundation in 1988. In 1989, he received a Presidential Young Investigator Award from the National Science Foundation. In 1990, he was selected by a Merrill Presidential Scholar as the faculty member who had the most positive effect on that student's education at Cornell. He was an Associate Editor of *IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS* 1990–1991 and was also an Editor for *Express Letters of IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS—I: FUNDAMENTAL THEORY AND APPLICATIONS*.